

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 December 2003 (31.12.2003)


PCT

(10) International Publication Number
WO-2004/000438 A1

- (51) International Patent Classification⁷: B01D 45/12, B04C 3/00, 9/00 (74) Agent: TANDBERGS PATENTKONTOR AS; Boks 7085, N-0306 Oslo (NO).
- (21) International Application Number: PCT/NO2003/000205 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 19 June 2003 (19.06.2003) (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2002 3021 21 June 2002 (21.06.2002) NO
- (71) Applicant (*for all designated States except US*): STATOIL ASA [NO/NO]; N-4035 Stavanger (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): HÅLAND, Trygve [NO/NO]; Skibmannsveien 26A, N-4056 Tananger (NO).

[Continued on next page]

(54) Title: ASSEMBLY TO SEPARATE LIQUID FROM A MULTIPHASE FLOW

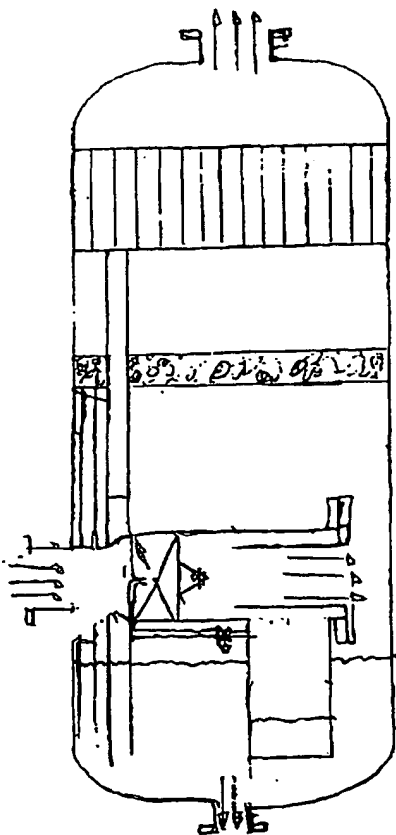

(57) Abstract: Assembly to separate out liquid from a multiphase fluid flow, comprising a scrubber, a column, a separator or other conventional separation equipment, combined with a deliquidizer that is connected as a preseparator to the fluid inlet, in that the deliquidizer functions according to a cyclone principle. With the assembly according to the invention the deliquidizer is modified such that it can be combined with conventional separation equipment such that a surprising improved technical effect is achieved. More specific the improved technical effect is achieved for assemblies where the deliquidizer is vertically oriented placed outside conventional separation equipment, with main flow direction upwards or downwards, or with the deliquidizer placed within conventional separation equipment.

WO 2004/000438 A1